


DEMONSTRATION BOARD DB-THERMO



PICTURE TAKEN WITH SONEL THERMAL IMAGER KT-384

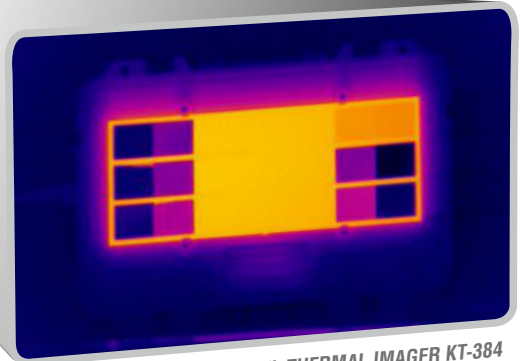

SOLID CASE



PROTECTIVE PLATE

DB-THERMO demonstration board is an essential device for every training on non-contact temperature measurement or thermal imaging. DB-Thermo helps to understand emissivity effects of various materials and material surface type effects which influence temperature measurement.

DB-THERMO set includes a manual describing all infrared measurement issues. The device is protected by a solid case with removable lid.

DB-THERMO hot plate has 0.96 emissivity, also includes various common material samples with different emissivity and matt or polished surface. Correct temperature of the hot plate guarantees programmable logic controller PLC. User has ability to set temperature from 40 °C to 60 °C which is displayed in real time on the LCD display.

Technical specifications:

- hot plate temperature range: 40 °C to 60 °C
- power consumption max.: 250 VA
- accuracy of hot plate temperature measurement: $\pm 1\%$
- temperature display resolution: 0.1 °C
- temperature setting resolution: 0.1 °C
- hysteresis: ± 3 °C
- temperature stabilization time: < 3 min

Electrical Safety:

- fuse protection: 2 x 250V F1A
- thermal protection: 75 °C

Other technical data:

- power supply: 230V AC
- display: LED, 4 digits (11mm) with graphical icons
- heating plate dimensions: 275 x 110 mm
- housing dimensions (W./L./H.): 330 x 260 x 140 mm
- weight: approx. 3 kg

Accessories:

- IEC power cord
- Protective plate for hot plate

Heat plate emissivity 0.96 - matt blacked aluminium (110 x 110 mm).

Emissivity of materials (plates 70 x 30 mm):

MATERIAL	EMISSIVITY	
	polished	matt
Copper	$\approx 0,05$	0,51
Brass	$\approx 0,05$	0,54
Steel	$\approx 0,05$	0,62
Laminate	0,96	0,98
Aluminium	$\approx 0,05$	0,65
Chrome steel	$\approx 0,05$	0,67

Sonel S.A.
Wokulskiego 11
58-100 Świdnica, PL
tel. +48 74 85 83 860
fax +48 74 85 83 809

export@sonel.pl
www.sonel.pl